


Technical specification

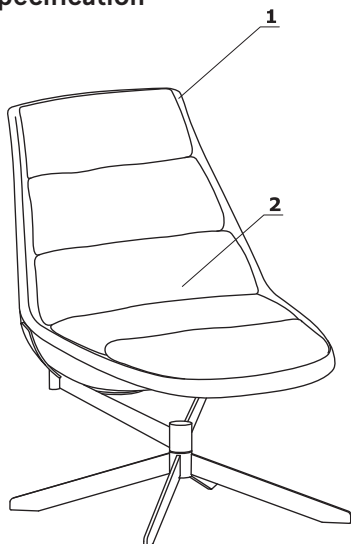

1. **Seat** – metal frame filled with foam, density of 55 kg/m³, upholstered
2. **Cushion** – plumage + polyurethane foam, upholstered


– max. load 120 kg

Fat Frank



Base F03:


- 4 - legged, metal, powder coated
- legs finished with metal feet in frame colour



Base F04:

- 4 - star, metal, powder coated
- swivel seat – 360°
- legs finished with polypropylene feet, colour: black

Dimensions

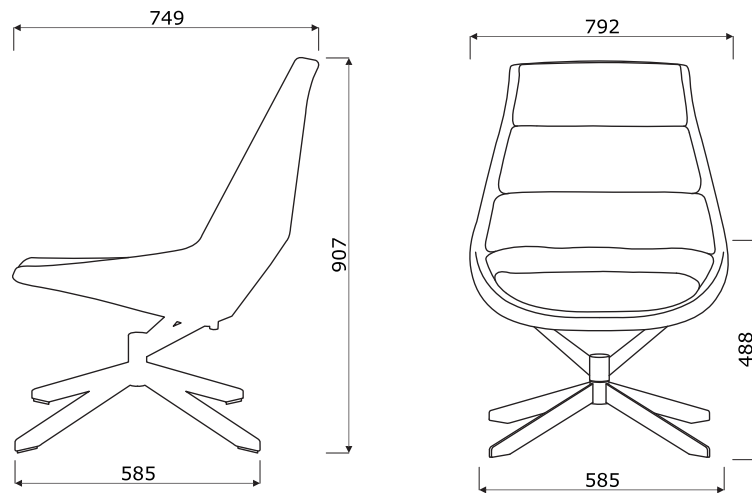

Fat Frank *



F03

792 / 749 / 907
23 kg



F04

792 / 749 / 907
23 kg

* dimensions expressed in millimeters: width x depth x height

Upholstered seat – Fabric Atlantic * – second price group



Technical data:

Material	polyester 100%
Fabric weight	530 g/lm (17.09 oz/lin.yd.)
Abrasion resistance rubs	BS EN ISO 12947-2, 110,000 Martindale cycles
Pilling resistance	scale 1-5, max. 5, EN ISO 12945-2 (4-5)
Colour fastness to light	scale 1-8, max. 8, EN ISO 105-B02 (5-7)
Colour fastness to rubbing	scale 1-5, max. 5, EN ISO 105x12 (wet/dry)
Flammability	CA TB 117-2013 ASTM E 84 Class I BS EN 1021-2 (match) BS EN 1021-1 (cigarette)

Upholstered seat – Fabric River – second price group



Technical data:

Material	polyester 100%
Fabric weight	300g/m2 (+/- 5%)
Abrasion resistance rubs	100,000 Martindale cycles (EN ISO 12947-1,2)
Pilling resistance	EN ISO 12945-2 (5)
Colour fastness to light	4 (EN ISO 105-B02)
Colour fastness to rubbing	dry: 4-5, wet: 3 (EN ISO 105-x12)
Flammability	BS 5852: Part 1, Ignition Source 0 (cigarette) BS 5852: Part 1, Ignition Source 1 (match) En1021 – 2

Upholstered seat – Fabric Xtreme – third price group




Technical data:

Material	100% Trevira Clame (CS) 100% Recykling (YS) Flame Retardant polyester. Non metallic dyestuffs.
Fabric weight	310 g/m2 ±5% (435g/lin.m ±5%)
Abrasion resistance rubs	60,000 Martindale cycles (CS) 100,000 Martindale cycles (YS)
Colour fastness to light	6 (ISO 105 – B02)
Colour fastness to rubbing	wet: 4, dry: 4 (ISO 105 – X12)
Flammability	EN 1021 – 1 (cigarette), EN 1021 – 2 (match) BS 7176 Low Hazard, NF P92-507 M1, DIN 4102 B1, UNI 9175 Class 1 IM, UNI 8456, UNI 9174 & UNI 9177 Classe Uno, ÖNORM B 3825 & A 3800-1 NF D 60-013

* There is a possibility of ordering the product in full colour spectrum of Atlantic range, as per Gabriel's pattern book, within 8 weeks

Upholstered seat – Fabric Synergy – third price group

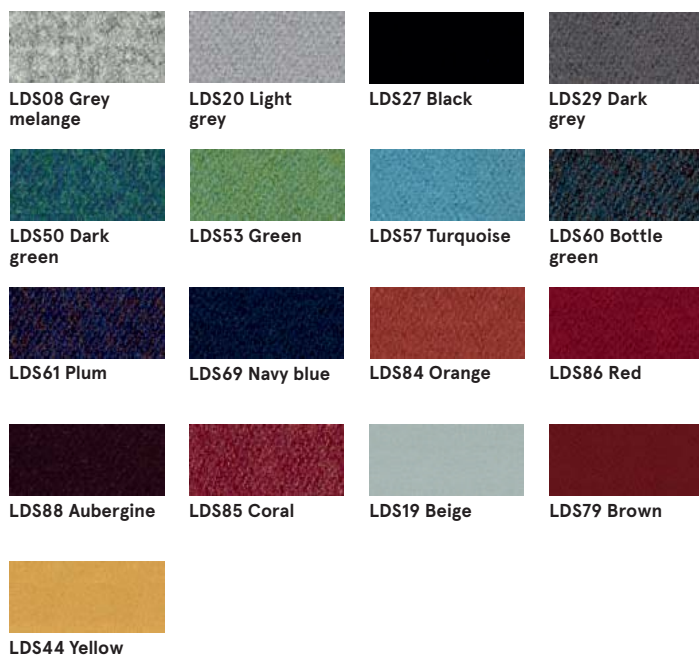

Technical data:

Material	95% Virgin Wool, 5% Poliamid
Fabric weight	400g/m2 ±5% (560 g/lin.m ±5%)
Abrasion resistance rubs	Independently certified ≥100,000 Martindale cycles
Colour fastness to light	5 (ISO 105 – B02)
Colour fastness to rubbing	ISO 105 – X12 – wet: 4, dry: 4
Flammability	EN 1021 – 1 (cigarette, EN 1021 – 2 (match), BS 7176 Low Hazard, UNI 9175 Classe 1 IM, ÖNORM B 3825 & A 3800-1

Upholstered seat – Fabric Note – third price group



Technical data:

Material	85% wools of New Zeland / 15% polyamide
Fabric weight	510g/m2 (16.45 OZ/lin.yd.)
Abrasion resistance rubs	200,000 Martindale cycles (EN ISO 12947-2)
Colour fastness to light	8 (EN ISO 105-B02)
Colour fastness to rubbing	dry: 4, wet: 4-5 (EN ISO 105x12)
Flammability	BS EN 1021 1&2(cigarette & match), BS 5852 0,1 cigarette & match, MED. Certifikat IMO, CA TB 117-2013

Fabric Silvertex – third price group

There is a possibility of ordering the product in full colour spectrum of Silvertex range, as per Spradling's pattern book, within 15 working days.

Technical data:

Material	Topcoat: 100% Vinyl Backing: 100% Polyesterr Hi-Loft TM
Fabric weight	685 gr/m ²
Abrasion resistance	>300,000 cycles Martindale
UV-resistance	>= 7 (1000 hours, blue wool scale)
Cold Crack resistance	-23°C
Flame retardancy	NF P 92-503 / M2 EN 1021, Part 1&2 DIN 4102 B2 ÖNORM B 3825, Gruppe I – Schwerbrennbares Verhalten ÖNORM A 3800, Teil I, Qualmbildungsklasse QI – schwachqualmend IMO Res. MSC.307 (88) (2010 FTP Code) Annex I Part 8 (MED) Marine Equipment Directive in its current valid version UNI 9175 (1987) / UNI 9175/FAI (1994) Classe I.IM (uno I EMME) UNE 23.727-90 IR /M2 EN 71-2: 2006+AI: 2007 Safety of Toys – Part 2: Flammability ECE R 118 (replaces Directive 95/28/EC) FMVSS 302 FAR 25/853
Antimicrobial	Antifungal Protection, Antibacterial Protection, Antimycotic Protection

Upholstered seat – Fabric Atlas – fourth price group

			
AS-531 Orange	AS-501 Pink	AS-651 Red	AS-681 Burgundy
			
AS-391 Brown	AS-781 Navy blue	AS-161 Dark grey	AS-111 Light grey
			
AS-971 Light green	AS-981 Dark green		

Technical data:

Material	90% new wool, 10% nylon
Fabric weight	286g/m ² , 400g/lm
Abrasion resistance rubs	100,000 cyklí Martindale, EN ISO 12947
Colour fastness to light	ISO 105 B02: 6-7
Colour fastness to rubbing	ISO 105-X12:2001, (wet/dry) 4-5/4-5
Flammability	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, BS 5852 ignition source 3, BS 5852 Part 1, NF D 60 013, UNI 9175 1IM, US Cal. Bull. 117-2013

Upholstered seat – Fabric Field2 – fourth price group

			
FD-463 Yellow	FD-963 Green	FD-123 Beige	FD-132 Grey
			
FD-142 Graphite	FD-662 Red	FD-673 Blue-red	FD-782 Navy blue
			
FD-693 Burgundy	FD-192 Black		

Technical data:

Material	100% Trevira CS
Fabric weight	321g/m ² , 450g/lm
Abrasion resistance rubs	100,000 cyklí Martindale, EN ISO 12947
Colour fastness to light	ISO 105 B02: 5-7
Flammability	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, DIN 4102 B1 FAR 25.853, UNI 9177 classe 1, US Cal. Bull. 117-2013

Leather – fourth price group



L01 Black



L02 Dark green



L03 Navy blue



L04 Light brown



L05 Dark brown



L06 Grey



L07 Beige

Technical data:

Material Leather type - corrected grain leather
Type of finishing - pigmented leather

Abrasion resistance rubs Dry: 500 cycles - min. 4 grey scale
Wet: 250 cycles - min. 4 grey scale
UNI EN ISO 11640

Colour fastness to light Light fastness: min. 4 grey scale,
UNI ISO 105-802

Flammability No ignition
UNI EN 1021-1-2006
BS EN 1021-1-2006

Base



M010 Light grey
semi-matt RAL7044



M011 Dark grey
semi-matt RAL7042



M012 Dark green
semi-matt RAL6012



M013 Burgundy
semi-matt RAL3007



M014 Red
semi-matt RAL3016



M016 Pearl white
semi-matt RAL1013



M115 Black
semi-matt RAL9005