


Technical specification

1. Seat – metal frame filled with foam, density of 55 kg/m³, upholstered

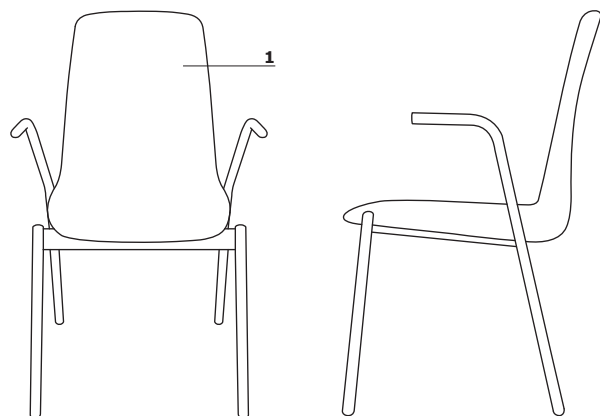

– max. load 120 kg

Ulti K



UKP7K

Base UKP7K

- 4 – star, metal, powder coated
- fixed seat
- legs 30 × 18 mm, wall thickness 1,5 mm; CNC – bent
- castors for soft or hard floors



UKP7

Base UKP7:

- 4 – star, metal, powder coated
- swivel seat – 360°
- legs 30 × 18 mm, wall thickness 1,5 mm; CNC – bent
- legs finished with polypropylene feet, colour: black



UKP1



*

Base UKP1:

- 4 – legged, metal, powder coated
- legs made of tube Ø22 mm, wall thickness 2,5 mm, CNC – bent
- legs finished with polypropylene feet, colour: black
- OPTION WITH EXTRA CHARGE – armrest




UKP3K

Base UKP3K:

- 4 – legged, metal armrests, powder coated
- legs made of tube Ø22 mm, wall thickness 2,5 mm, CNC – bent
- castors for soft or hard floors

Ulti K	Date of preparation 28.08.2020	The data contained in this document is valid in the day of its preparation. Change of the product, as long as it does not affect the basic features of it, does not require consistent updates of the document.	page 3/11
			technical specification

Ulti K



Base UKP5:

- cantilever, metal, powder coated
- legs made of tube Ø12 mm, CNC - bent
- polypropylene feet, colour: black
- armrest made of pipe (12mm diameter) with metal cover plates, upholstered




Base UKP4:

- 4 - star, aluminum, powder coated
- swivel seat - 360°
- aluminium cast
- legs finished with polypropylene feet, colour: black



Base UKP4K:

- 4 - star, aluminum, powder coated
- swivel seat - 360°
- aluminium cast
- castors for soft or hard floors




Base UKP5:


- cantilever, metal, powder coated
- legs made of tube Ø12 mm, CNC - bent
- polypropylene feet, colour: black
- armrest made of pipe (12 mm diameter) with metal cover plates

Technical specification - tables UTR


- 1. Top - MFC 18 mm, black, ABS edges 2 mm
- 2. Legs - Ø45 mm (UTR45) and Ø40 mm (UTR65), natural wood

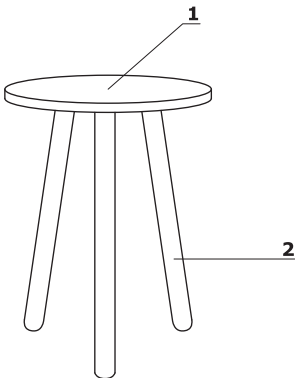

Dimensions - Ulti K

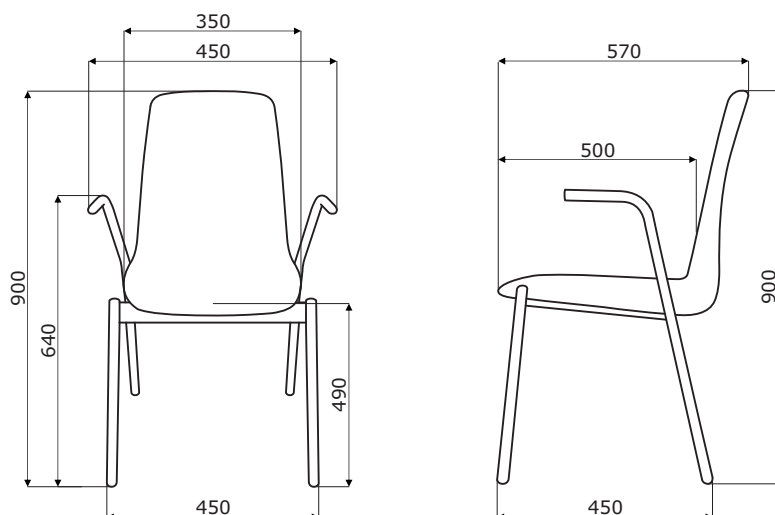

Dimensions - tables UTR

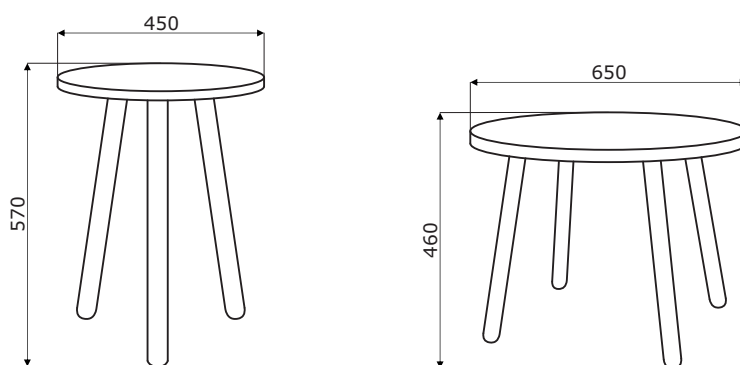

Ulti K *



UKP7K
12 kg



UKP7
12 kg



UKP1
12 kg



UKP3K
12 kg



UKP5
12 kg



UKP4
12 kg



UKP4K
12 kg



UKP5
12 kg

Tables *



UTR45
450 / 450 / 570
6 kg



UTR65
650 / 650 / 460
8 kg

* dimensions expressed in millimeters: width x depth x height

Ulti K	Date of preparation 28.08.2020	The data contained in this document is valid in the day of its preparation. Change of the product, as long as it does not affect the basic features of it, does not require consistent updates of the document.	page 7/11
			products

Seat - Fabric Medley - second price group



Technical data:

Material	polyester 100%
Fabric weight	510 g/lm (16.45 oz/lin.yd.)
Abrasion resistance rubs	BS EN ISO 12947-2, 75,000 cykli Martindale
Pilling resistance	scale 1-5, max. 5, EN ISO 12945-2 (4)
Colour fastness to light	scale 1-8, max. 8, EN ISO 105-B02 (5-7)
Colour fastness to rubbing	scale 1-5, max. 5, EN ISO 105x12 (wet/dry (4-5/4-5))
Acoustic test sound absorption	ISO 354
Flammability	BS EN 1021-1 (cigarette) BS 476 Part 7, Class 2 Class Uno UNI 9174 - UNI 8457 CA TB 117-2013 ASTM E 84 Class I

Seat - Fabric Atlantic * - second price group



Technical data:

Material	polyester 100%
Fabric weight	530 g/lm (17.09 oz/lin.yd.)
Abrasion resistance rubs	BS EN ISO 12947-2, 110,000 Martindale cycles
Pilling resistance	scale 1-5, max. 5, EN ISO 12945-2 (4-5)
Colour fastness to light	scale 1-8, max. 8, EN ISO 105-B02 (5-7)
Colour fastness to rubbing	scale 1-5, max. 5, EN ISO 105x12 (wet/dry)
Flammability	CA TB 117-2013 ASTM E 84 Class I BS EN 1021-2 (match) BS EN 1021-1 (cigarette)

Seat - Fabric Vita - second price group



Technical data:

Material	Surface: 98,5% PVC, 1,5% PU Substrate: 50% polyester, 50% Cotton
Fabric weight	850g/m2 ± 10% (1190G/lin. m ± 10%)
Abrasion resistance rubs	BS EN ISO 5470-2, 100,000 Martindale cycles
Colour fastness to light	6 (ISO 105 - B02)
Colour fastness to rubbing	wet: 4, dry: 4 (ISO 105 - X12)
Flammability	BS EN 1021 - (cigarette) BS EN 1021 - 2 (match) BS 5852 - (Ignition Source 5) BS 7176 - (Medium Hazard)
Flexes	BS EN ISO 7854 - Method B, 400.000 Flexing cycles
Anti-microblal / Anti-fungal	AATCC 147

* There is a possibility of ordering the product in full colour spectrum of Atlantic range, as per Gabriel's pattern book, within 8 weeks

Seat - Fabric River - second price group



Technical data:

Material	polyester 100%
Fabric weight	300g/m2 (+/- 5%)
Abrasion resistance rubs	100,000 Martindale cycles (EN ISO 12947-1,2)
Pilling resistance	EN ISO 12945-2 (5)
Colour fastness to light	4 (EN ISO 105-B02)
Colour fastness to rubbing	dry: 4-5, wet: 3 (EN ISO 105-x12)
Flammability	BS 5852: Part 1, Ignition Source 0 (cigarette) BS 5852: Part 1, Ignition Source 1 (match) En1021 - 2

Seat - Fabric Xtreme - third price group



Technical data:

Material	100% Trevira Clame (CS) 100% Recykling (YS) Flame Retardant polyester. Non metallic dyestuffs.
Fabric weight	310 g/m2 ±5% (435g/lin.m ±5%)
Abrasion resistance rubs	60,000 Martindale cycles (CS) 100,000 Martindale cycles (YS) 6 (ISO 105 - B02)
Colour fastness to light	wet: 4, dry: 4 (ISO 105 - X12)
Colour fastness to rubbing	EN 1021 - 1 (cigarette), EN 1021 - 2 (match)
Flammability	BS 7176 Low Hazard, NF P92-507 M1, DIN 4102 B1, UNI 9175 Class 1 IM, UNI 8456, UNI 9174 & UNI 9177 Classe Uno, ÖNORM B 3825 & A 3800-1 NF D 60-013

Seat - Fabric Synergy - third price group



Technical data:

Material	95% Virgin Wool, 5% Poliamid
Fabric weight	400g/m2 ±5% (560 g/lin.m ±5%)
Abrasion resistance rubs	Independently certified ≥100,000 Martindale cycles
Colour fastness to light	5 (ISO 105 - B02)
Colour fastness to rubbing	ISO 105 - X12 - wet: 4, dry: 4
Flammability	EN 1021 - 1 (cigarette), EN 1021 - 2 (match), BS 7176 Low Hazard, UNI 9175 Classe 1 IM, ÖNORM B 3825 & A 3800-1

Fabric Silvertex – third price group

There is a possibility of ordering the product in full colour spectrum of Silvertex range, as per Spradling's pattern book, within 15 working days.

Technical data:

Material	Topcoat: 100% Vinyl Backing: 100% Polyesterr Hi-Loft TM
Fabric weight	685 gr/m ²
Abrasion resistance	>300,000 cycles Martindale
UV-resistance	>= 7 (1000 hours, blue wool scale)
Cold Crack resistance	-23°C
Flame retardancy	NF P 92-503 / M2 EN 1021, Part 1&2 DIN 4102 B2 ÖNORM B 3825, Gruppe I – Schwerbrennbares Verhalten ÖNORM A 3800, Teil I, Qualmbildungsklasse QI – schwachqualmend IMO Res. MSC.307 (88) (2010 FTP Code) Annex I Part 8 (MED) Marine Equipment Directive in its current valid version UNI 9175 (1987) / UNI 9175/FAI (1994) Classe I.IM (uno I EMME) UNE 23.727-90 IR /M2 EN 71-2: 2006+AI: 2007 Safety of Toys – Part 2: Flammability ECE R 118 (replaces Directive 95/28/EC) FMVSS 302 FAR 25/853
Antimicrobial	Antifungal Protection, Antibacterial Protection, Antimycotic Protection

Seat – Fabric Atlas – fourth price group

			
AS-531 Orange	AS-501 Pink	AS-651 Red	AS-681 Burgundy
			
AS-391 Brown	AS-781 Navy blue	AS-161 Dark grey	AS-111 Light grey
			
AS-971 Light green	AS-981 Dark green		

Technical data:

Material	90% new wool, 10% nylon
Fabric weight	286g/m ² , 400g/lm
Abrasion resistance rubs	100,000 cykli Martindale, EN ISO 12947
Colour fastness to light	ISO 105 B02: 6-7
Colour fastness to rubbing	ISO 105-X12:2001, (wet/dry) 4-5/4-5
Flammability	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, BS 5852 ignition source 3, BS 5852 Part 1, NF D 60 013, UNI 9175 1IM, US Cal. Bull. 117-2013


Seat – Fabric Field2 – fourth price group

			
FD-463 Yellow	FD-963 Green	FD-123 Beige	FD-132 Grey
			
FD-142 Graphite	FD-662 Red	FD-673 Blue-red	FD-782 Navy blue
			
FD-693 Burgundy	FD-192 Black		

Technical data:

Material	100% Trevira CS
Fabric weight	321g/m ² , 450g/lm
Abrasion resistance rubs	100,000 cykli Martindale, EN ISO 12947
Colour fastness to light	ISO 105 B02: 5-7
Flammability	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, DIN 4102 B1 FAR 25.853, UNI 9177 classe 1, US Cal. Bull. 117-2013

Leather – fourth price group

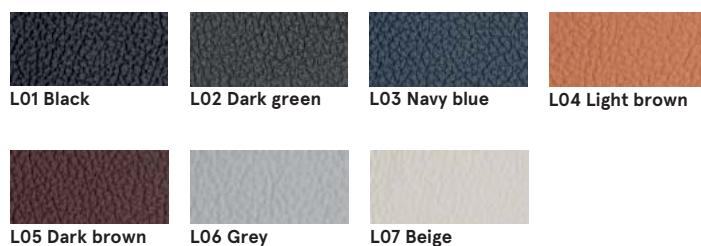

Technical data:

Material	Leather type - corrected grain leather Type of finishing - pigmented leather
Abrasion resistance rubs	Dry: 500 cycles - min. 4 grey scale Wet: 250 cycles - min. 4 grey scale UNI EN ISO 11640
Colour fastness to light	Light fastness: min. 4 grey scale, UNI ISO 105-802
Flammability	No ignition UNI EN 1021-1-2006 BS EN 1021-1-2006

Metal – base



Castors



Tables UTR – top



Tables UTR – base – wood

